



IJEAST

INTERNATIONAL JOURNAL
OF ENGINEERING APPLIED SCIENCE
AND TECHNOLOGY



VOLUME : 9 ISSUE : 05 Print / Issue Publication Date: 08-Dec-2024



ISSN : 2455-2143



DOI : 10.33564/IJEAST.2024.v09i05.021

Indexed In



WWW.IJEAST.COM

editor@ijeast.com

ROBUST ANALYTICAL VEHICLE FOR EXPLORATION AND NAVIGATION (RAVEN)

Amith Mathew Titus, Manukuttan P, Mohamed Afran, Vignesh V, Dr. V. Balamurugan, Asha Arvind
Department of Electronics and Communication,
Ahalia School of Engineering and Technology,
Palakkad, Kerala-678557

Abstract: The Robust Analytical Vehicle for Exploration and Navigation (RAVEN) aims to create an advanced platform capable of supporting a variety of exploration and navigation tasks in challenging environments. Leveraging cutting-edge technologies in robotics and sensor integration, RAVEN is designed to operate autonomously while providing real-time data analysis and decision-making capabilities. This project addresses the need for reliable exploration tools in sectors such as environmental monitoring, disaster response, and defence application, where traditional methods may fall short due to hazardous conditions or remote locations. In addition to its innovative design, RAVEN incorporates a modular architecture, allowing for easy customization and enhancement of its functionalities based on specific mission requirements. The vehicle's robust analytical capabilities enable it to process extensive datasets, aiding in the identification of patterns and anomalies critical for effective navigation and exploration. Through a series of field tests and simulations, the project will evaluate RAVEN's performance, ensuring its reliability and efficiency in real-world applications. Ultimately, this project seeks to contribute significantly to the fields of robotics and exploration, enhancing our ability to navigate and analyze the unknown.

Keywords: RAVEN, Robust Analytical Vehicle, Exploration, Navigation, Data Analysis, Decision-Making, Robotics, Sensor, Integration, Environmental Monitoring, Disaster Response, Defense Applications, Modular Architecture, Data Processing, Simulations, Robotics and Exploration

I. INTRODUCTION

In an era where technological advancements are transforming the landscape of exploration and navigation, the Robust Analytical Vehicle for Exploration and Navigation (RAVEN) stands at the forefront of innovation, addressing the increasing need for reliable and efficient tools across sectors such as environmental monitoring, disaster response, and defence applications. Traditional methods often fall short in challenging and hazardous environments, underscoring the need for an autonomous platform capable of adapting to diverse mission

requirements. Engineered with cutting-edge technologies in robotics and sensor integration, RAVEN operates autonomously while providing real-time data analysis and decision-making capabilities. Its modular architecture allows for seamless customization, ensuring that the vehicle can be tailored to specific operational demands. RAVEN's robust analytical capabilities empower it to process extensive datasets effectively, facilitating the identification of critical patterns and anomalies for successful navigation and exploration. Through rigorous field tests and simulations, this project will evaluate RAVEN's performance, confirming its reliability and efficiency in real-world scenarios and contributing significantly to the fields of robotics and exploration, enhancing our ability to navigate and analyze the unknown.

II. PROPOSED ALGORITHM

A. Initialization and Data Collection

To activate the Unmanned Ground Vehicle (UGV), the process begins with its initialization, which includes activating all sensors such as depth cameras and LiDAR. Following this, wireless connections are established for data transmission using ROS2 DDS, ensuring reliable communication between system components. The UGV then engages in continuous data acquisition, collecting environmental data from the sensors to facilitate precise navigation and effective obstacle detection.

B. Data Integration and Localization

The next step involves integrating sensor data by combining information from depth cameras and LiDAR, utilizing Simultaneous Localization and Mapping (SLAM) techniques to create dynamic maps of the environment. To further enhance the localization process, odometry is employed, which enables accurate positioning of the UGV within these maps, thereby improving its overall navigational capabilities.

C. Dynamic Path Planning and Navigation

In the subsequent phase, path planning is implemented by utilizing Nav2 for dynamic navigation, which allows the UGV to effectively maneuver around obstacles. To ensure adaptability, real-time feedback and decision-making algorithms are incorporated, enabling the UGV to adjust its navigation strategies based on changes in the environment. Additionally, feedback systems are employed to refine

navigation further, preventing collisions with both static and dynamic obstacles, thereby enhancing the safety and efficiency of the UGV's operations.

D. User Engagement and Safety Mechanisms

A user interface is provided to allow operators to monitor environmental data and the status of the UGV, facilitating manual control when necessary. To ensure safety, immediate stop features are integrated to halt operations upon detecting any anomalies, along with proactive collision avoidance mechanisms during navigation. These safety features are essential for maintaining operational integrity and protecting both the UGV and its surroundings while enhancing the overall user experience.

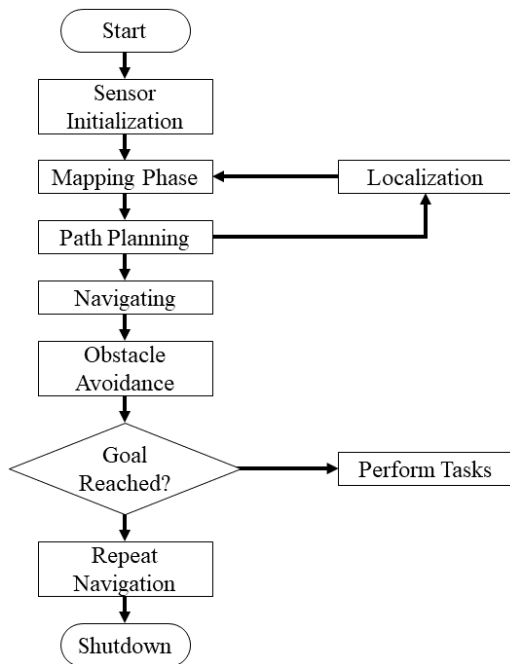


Fig. 1. RAVEN algorithm flow

III. EXPERIMENT AND RESULT

The development and integration of various components for the robotic system were systematically executed to evaluate their performance and effectiveness. The following steps outline the key components that were created and tested during this process.

E. URDF Creation

The Unified Robot Description Format (URDF) was developed to detail the physical configuration of the robot, encompassing its joints, links, and visual representations. This foundational step provided a clear structure for the robot's design.

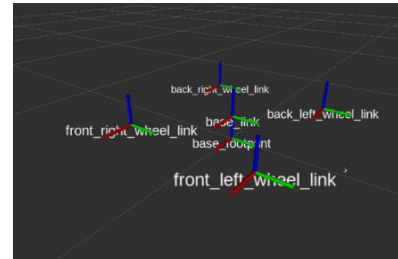


Fig. 2. Links created for the robot

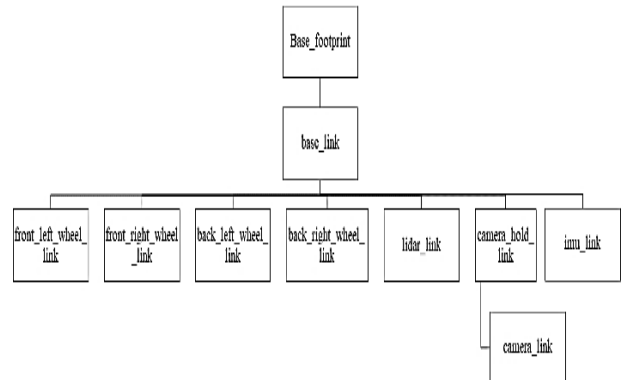


Fig. 3. Block Diagram of URDF

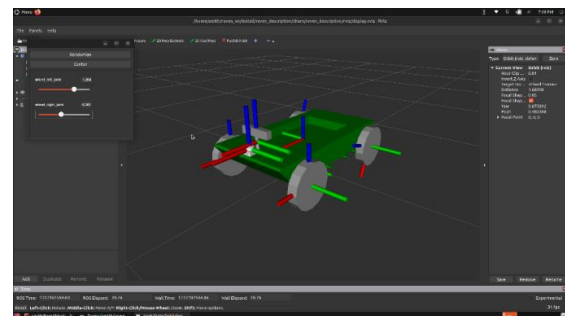


Fig. 4. Joint State Publisher controlling URDF

F. Robot Visualization Launch File

A configuration file was established to initiate a visualization environment, enabling users to observe the robot model in a graphical interface, typically utilizing tools such as Rviz. This facilitated a better understanding of the robot's physical.

G. GAZEBO Simulation Launch File

A launch file was created for Gazebo, a robotics simulator that allows for the testing of robotic algorithms in a 3D environment. This simulation provided realistic physics and sensor feedback, essential for validating robotic behaviours in a controlled setting.

H. Control Algorithms Development

- **Simple Controller:** A basic control algorithm was implemented, managing the robot's movements through

direct input-output relationships, without complex decision-making processes.

- **Differential Drive Controller:** A specialized control system for robots with a differential drive mechanism was developed, enabling navigation through varying wheel speeds independently.
- **Noisy Controller:** This controller was designed to manage and compensate for noise in sensor data or actuator performance, ensuring more stable and reliable robot behaviour during operation.

```

smith@amithbot:~/raven_ws$ ros2 topic pub /simple_velocity_controller/commands std_msgs/msg/Float64MultiArray "layout:
  dim: []
  data_offset: 0
  data: [10,10]"
    
```

Fig. 5. Simple Controller

```

smith@amithbot:~/raven_ws$ ros2 topic pub /raven_controller/cmd_vel geometry_msgs/msg/TwistStamped "header:ader:ader:
  stamp: 0c: 0
  sec: 0c: 0
  nanosec: 0
  frame_id: ''
  twist:ar:0
  linear:0
  x: 0.0
  y: 0.0
  z: 0.0
  angular:
  x: 0.0
  y: 0.0
  z: 0.0" -r 10
    
```

Fig. 6. Differential Drive Controller

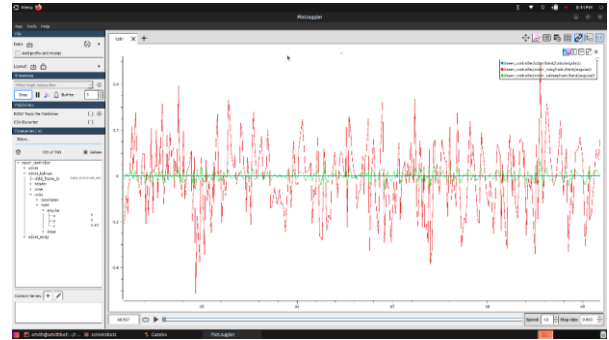


Fig. 7. Kalman filtering the odometry values.

J. Remote Control and Navigation

- **Joystick Teleoperation:** A method was implemented for remote control of the robot using a joystick, enabling manual control over the robot's movements and actions.

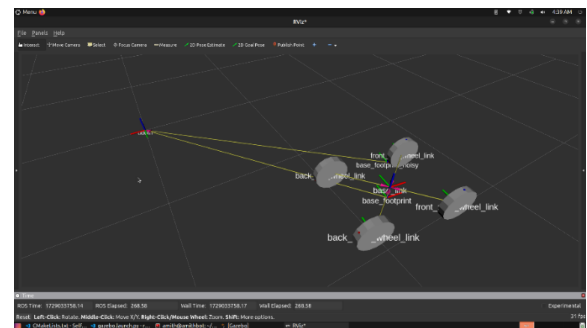


Fig. 8. Joystick teleoperation

- **NAV2-Based Simulation:** The Navigation 2 framework was utilized for simulating navigation tasks, including path planning, obstacle avoidance, and goal-reaching capabilities in a simulated environment.

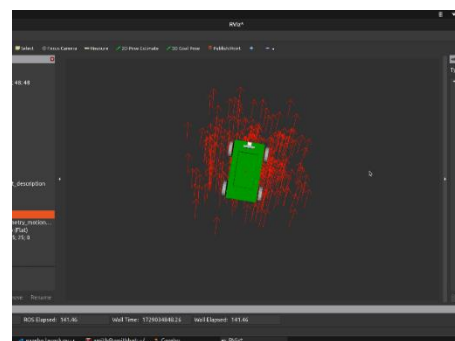


Fig. 9. Linear pose estimation

I. Advanced Sensor Integration

- **Kalman Filter:** An algorithm was employed for estimating the state of the dynamic system from a series of incomplete and noisy measurements, commonly utilized for sensor fusion in robotics.
- **Sensor Integration:** The process of combining data from various sensors, such as LiDAR and cameras, was executed to enhance the robot's understanding of its environment and improve decision-making capabilities.

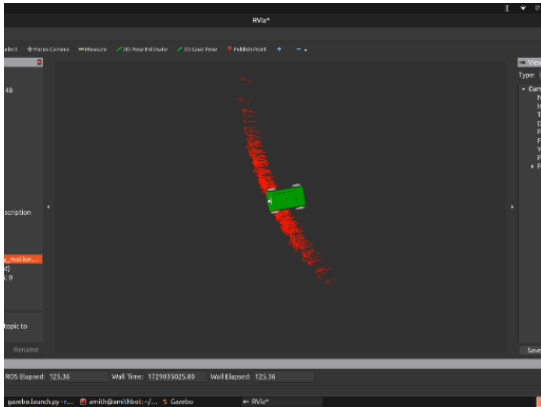


Fig. 10. Angular pose estimation

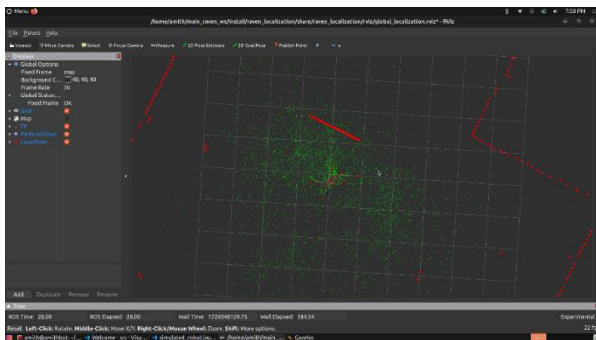


Fig. 11. Nav2 Adaptive Monte-Carlo Localizer particles

- **SLAM Simulation:** The Simultaneous Localization and Mapping (SLAM) technique was simulated to create a map of an unknown environment while concurrently tracking the robot's location.

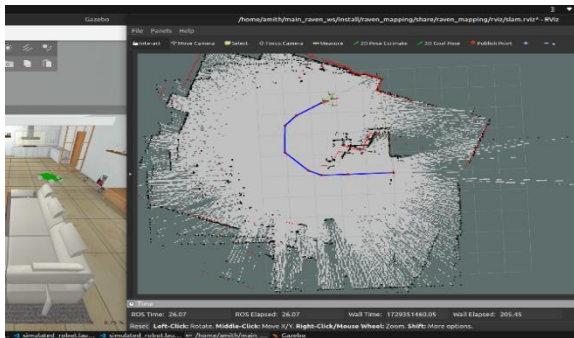


Fig. 12. Unknown map mapping using SLAM

K. Final Firmware Launch File

The culmination of the project involved creating a launch file that initializes and executes the final firmware code on the robot. This file encompassed all necessary configurations and parameters for effective operation in real-world scenarios, referred to as `simulated_robot.launch.py`.

The integration of these components significantly enhanced the performance and capabilities of the robotic system. The successful creation of URDF and simulation launch files

facilitated accurate modelling and testing of the robot's behaviours in a controlled environment. The development of various controllers and sensor integration techniques contributed to improved navigation, obstacle avoidance, and overall reliability.

The results from the simulated tests indicated that the robot could effectively navigate complex environments, adapt to dynamic conditions, and maintain stable operations under various scenarios. The joystick teleoperation method provided operators with intuitive control, while the safety mechanisms ensured secure interactions during remote operations. The findings demonstrate the potential of the robotic system in real-world applications, paving the way for further advancements in autonomous navigation technologies.

IV. CONCLUSION

The development and integration of the RAVEN UGV have successfully demonstrated significant advancements in autonomous navigation and obstacle detection capabilities. Through the systematic creation of essential components, including the URDF, simulation launch files, and robust control algorithms, the UGV has showcased its ability to operate effectively in complex environments.

The implementation of advanced techniques such as sensor integration and SLAM has enabled the UGV to maintain accurate localization while mapping unknown terrains, enhancing its situational awareness and decision-making processes. The incorporation of dynamic path planning through the NAV2 framework and the utilization of real-time feedback systems have further refined the UGV's navigation abilities, allowing it to adapt to changing conditions and navigate safely around obstacles.

Moreover, the user interface and joystick teleoperation capabilities empower operators with flexible control and monitoring options, ensuring that human oversight remains integral to the UGV's operations. The safety features integrated into the system provide an added layer of protection, promoting secure interactions during navigation tasks.

Overall, the results from the simulation tests validate the effectiveness of the developed framework and highlight the UGV's potential for various applications in fields such as search and rescue, environmental monitoring, and exploration in hazardous environments. Future work will focus on enhancing the UGV's capabilities by incorporating machine learning algorithms for improved autonomous decision-making and expanding its operational range in increasingly complex scenarios. The progress made in this research lays a strong foundation for advancing the state of autonomous vehicles and their applications in real-world situations.

V. REFERENCES

- [1] Q. Zou, Q. Sun, L. Chen, B. Nie and Q. Li, (2022), "A Comparative Analysis of LiDAR SLAM-Based Indoor Navigation for Autonomous Vehicles" in IEEE



- Transactions on Intelligent Transportation Systems, vol. 23, no. 7, pp. 6907-6921, doi: 10.1109/TITS.2021.3063477.
- [2] Roy R, Tu Y-P, Sheu L-J, Chieng W-H, Tang L-C, Ismail H., (2023), "Path Planning and Motion Control of Indoor Mobile Robot under Exploration-Based SLAM (e-SLAM)". *Sensors* 2023.; 23(7):3606. <https://doi.org/10.3390/s23073606>.
- [3] Dong Shen, Yuhang Xu, and Yakun Huang. (2019). "Research on 2D-SLAM of Indoor Mobile Robot based on Laser Radar". In *Proceedings of the 2019 4th International Conference on Automation, Control and Robotics Engineering (CACRE2019)*. Association for Computing Machinery, New York, NY, USA, Article 64, 1-7. <https://doi.org/10.1145/3351917.3351966>.
- [4] L. Mu, P. Yao, Y. Zheng, K. Chen, F. Wang and N. Qi, (2020), "Research on SLAM Algorithm of Mobile Robot Based on the Fusion of 2D LiDAR and Depth Camera" in *IEEE Access*, vol. 8, pp. 157628-157642, 2020, doi: 10.1109/ACCESS.2020.3019659.
- [5] M. U. Khan, S. A. A. Zaidi, A. Ishtiaq, S. U. R. Bukhari, S. Samer and A. Farman, (2021) "A Comparative Survey of LiDAR-SLAM and LiDAR-based Sensor Technologies" *Mohammad Ali Jinnah University International Conference on Computing (MAJICC)*, Karachi, Pakistan, 2021, pp. 1-8, doi: 10.1109/MAJICC53071.2021.9526266.
- [6] Y. Li and C. Shi, (2018) "Localization and Navigation for Indoor Mobile Robot Based on ROS," 2018 Chinese Automation Congress (CAC), Xi'an, China, 2018, pp. 1135-1139, doi: 10.1109/CAC.2018.8623225.
- [7] W. A. Syaqr et al., (2018) "Mobile Robot Based Simultaneous Localization and Mapping in UniMAP's Unknown Environment," 2018 International Conference on Computational Approach in Smart Systems Design and Applications (ICASSDA), Kuching, Malaysia, 2018, pp. 1-5, doi: 10.1109/ICASSDA.2018.8477629
- [8] S. Gatesichapakorn, J. Takamatsu and M. Ruchanurucks, (2019), "ROS based Autonomous Mobile Robot Navigation using 2D LiDAR and RGB-D Camera," 2019 First International Symposium on Instrumentation, Control, Artificial Intelligence, and Robotics (ICA-SYMP), Bangkok, Thailand, 2019, pp. 151-154, doi: 10.1109/ICA-SYMP.2019.8645984
- [9] Y. K. Tee and Y. C. Han, (2021) "Lidar-Based 2D SLAM for Mobile Robot in an Indoor Environment: A Review," 2021 International Conference on Green Energy, Computing and Sustainable Technology (GECOST), Miri, Malaysia, 2021, pp. 1-7, doi: 10.1109/GECOST52368.2021.9538731
- [10] Xiaozhuo Yang (2021), "Slam and navigation of indoor robot based on ROS and lidar", *J. Phys.: Conf. Ser.* 1748 022038, DOI: 10.1088/1742-6596/1748/2/022038
- [11] Cu, Xuan & Vintr, Zdenek & Mai, Duc. (2021). Prediction of the Lifetime of Tank Track Components Using the Accelerated Testing. 1-6. 10.1109/ICMT52455.2021.9502824.
- [12] Pedraza-Yepes, Cristian & González Coneo, Jorge & Mancera-Trejos, Carlos & Florez-Sarmiento, Luis & Torres Diaz, Gabriel & Gonzalez Olier, Camilo. (2020). Design and construction of tank-chassis and lifting structure for centrifugal pump h1260 m powered by a diesel engine. *Journal of Engineering and Applied Sciences*. 15. 1438.
- [13] Wang, G.-S & Yao, L.-Y & Wei, L.-S & Piao, Y. & Gu, L.. (2016). Research on the influence of linear vibration of a tank chassis on on-the-move shooting accuracy. 37. 541-546. 10.3969/j.issn.1000-1093.2016.03.021.
- [14] Lonare, Girish. (2022). Design of Chassis for Automated Road Cleaning Vehicle. Volume: 09. 557.

IJEAST

INTERNATIONAL JOURNAL
OF ENGINEERING APPLIED SCIENCE
AND TECHNOLOGY

ABOUT IJEAST

International Journal of Engineering Applied Science and Technology (IJEAST) is a peer-reviewed, open access journal that publishes high-quality research papers in the field of Engineering, Applied Science and Technology.

IJEAST aims to provide a platform for researchers, academicians, and professionals to share their innovative ideas, research findings, and practical experiences with the global scientific community.

FOCUS AREAS

- Engineering
- Applied Science
- Technology
- Innovation & Development
- Interdisciplinary Studies



PEER REVIEWED

All submissions are rigorously peer reviewed to ensure quality.



OPEN ACCESS

Free and unrestricted access to research for all.



GLOBAL REACH

Connecting researchers and professionals worldwide.



TIMELY PUBLICATION

We ensure a swift and efficient publication process.



For more information, visit our website
www.ijeast.com



INTERNATIONAL JOURNAL
OF ENGINEERING APPLIED SCIENCE
AND TECHNOLOGY

✉ editor@ijeast.com

🌐 www.ijeast.com

📍 India



2455-2143